




HWPPMC and SBPEMC
metal-content cable protection

Detectable cable protection products
for the food-processing industry



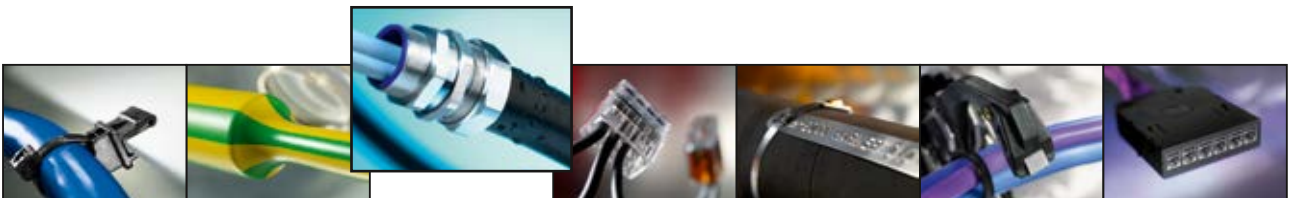

Cable Protection Systems

Protective Tubing and Spiral Binding

Metal-Content Cable Cover

• Helawrap HWPPMC

HWPPMC is particularly suitable for installation and maintenance for food-processing machines and in food-processing plants.

Features and Benefits

- High metal-content for reliable detection with standard detection equipment
- Quick and effortless to apply
- Stainless steel preserves resistance to corrosion
- Blue colour for enhanced visibility
- Ideal solution for bundling and protecting cables and hoses
- Highly flexible
- Very good abrasion protection
- Special profile enables branching off cable at any point
- Can be removed and reused
- Handy applicator tool included



HWPPMC metal-content cable cover.

MATERIAL	Polypropylene (PP), Stainless Steel (SS)
Operating Temperature	-60 °C to +100 °C, intermittent +140 °C
Flammability	UL94 HB



Insert one or more cables into the insertion slot of the applicator tool.



Place the applicator tool in one end of the Helawrap cable cover.



Simply slide the applicator tool through the Helawrap cover.

TYPE	Bundle Ø max.	Colour	Reel Length	Application Tool	Article-No.
HWPPMC8	9.0	Blue (BU)	25 m	HAT8	161-66000
HWPPMC16	16.0	Blue (BU)	25 m	HAT16	161-66100
HWPPMC20	21.0	Blue (BU)	25 m	HAT20	161-66200
HWPPMC25	27.0	Blue (BU)	25 m	HAT25	161-66300
HWPPMC30	32.0	Blue (BU)	25 m	HAT30	161-66400

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.



Metal-Content Spiral Binding

- SBPEMC

SBPEMC is designed for applications in food-processing plants and machines.

Features and Benefits

- High metal-content for reliable detection with standard detection equipment
- Stainless steel preserves resistance to corrosion
- Blue colour for enhanced visibility
- Ideal solution for bundling and protecting cables and hoses
- Highly flexible
- Suitable for retro-fitting
- Branching off cable at any point



SBPEMC metal-content spiral binding.

MATERIAL	Polyethylene (PE), Stainless Steel (SS)
Operating Temperature	-60 °C to +80 °C, intermittent +120 °C
Flammability	UL94 HB



Detectable, metal-content spiral binding protects cables on food-processing machines.



One Step to the Web!

TYPE	Bundle Ø min.	Bundle Ø max.	Colour	Reel Length	Article-No.
SBPEMC1.5	1.6	8.0	Blue (BU)	30 m	161-46000
SBPEMC4	5.0	20.0	Blue (BU)	30 m	161-46100
SBPEMC9	10.0	100.0	Blue (BU)	30 m	161-46200
SBPEMC16	20.0	150.0	Blue (BU)	30 m	161-46300

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.



HellermannTyton

HellermannTyton Ltd

Wharf Approach

Aldridge, Walsall, West Midlands

WS9 8BX

Tel: +44 1922 458 151

Fax: +44 1922 743 053

E-Mail: info@HellermannTyton.co.uk

www.HellermannTyton.co.uk