


# 1200 SERIES

T SHAPES  
-VG STYLE

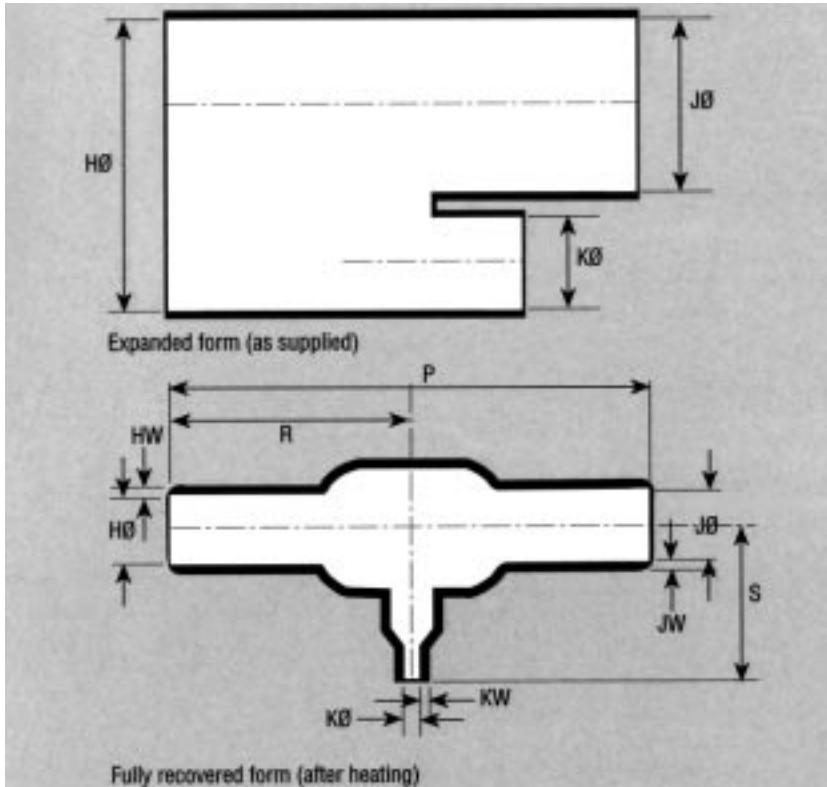

This style provides strain relief, sealing and mechanical protection on cable harnesses.

VG shapes according to T09 add 'P' after Hellermann part number

Dimensions apply to all materials unless otherwise indicated and are in inches.

VG Part No.	Hellermann Part No.	Expanded (Min)			Recovered (Max)			Recovered dimensions fully shrunk				
		H	J	K	H	J	K	P ±10%	R ±10%	S ±10%	KW +20%	HW, JW +20%
VG95343 T 08A 009 A	* 1206-1	0.26	0.26	0.26	0.12	0.12	0.12	1.17	0.58	0.58	0.04	0.04
VG95343 T 08A 001 A	* 1203-1	0.52	0.52	0.26	0.24	0.12	0.12	2.05	1.02	0.76	0.04	0.06
VG95343 T 08A 010 A	* 1202-1	0.52	0.52	0.52	0.24	0.24	0.24	2.31	1.15	1.15	0.06	0.06
—	* 1205-1	0.70	0.67	0.30	0.35	0.35	0.15	2.00	1.00	1.00	0.04	0.06
VG95343 T 08A 007 A	1201-1	0.70	0.70	0.40	0.35	0.35	0.20	1.87	0.93	0.93	0.04	0.06
VG95343 T 08A 002 A	* 1209-1	1.06	1.06	0.52	0.49	0.49	0.24	4.25	2.13	2.13	0.06	0.10
VG95343 T 08A 011 A	* 1207-1	1.06	1.06	1.06	0.49	0.49	0.49	4.73	2.20	2.20	0.10	0.10
—	1230-1	0.78	0.78	0.78	0.40	0.40	0.40	3.54	1.77	1.77	0.08	0.08

MATERIALS AVAILABLE		
Reference	Specification	Description
J	* MIL-I-81765/TYPE II	Flexible polyolefin
B7	* MIL-I-81765/TYPE I	Semi-rigid flame retarded polyolefin
G	* VG 95343 PART 6	Fluid resistant elastomer
H	NAVSEA 5617649	Flexible limited fire hazard material

ADHESIVE COATING OPTIONS	
Reference	Description
WM250	General purpose hot melt +80°C
W8	High performance hot melt +105°C

For ordering procedure – refer to page 5


\* Standard products and material.

# 1200 SERIES

OFF-SET  
T SHAPES



This style provides strain relief, sealing and mechanical protection on cable harness.

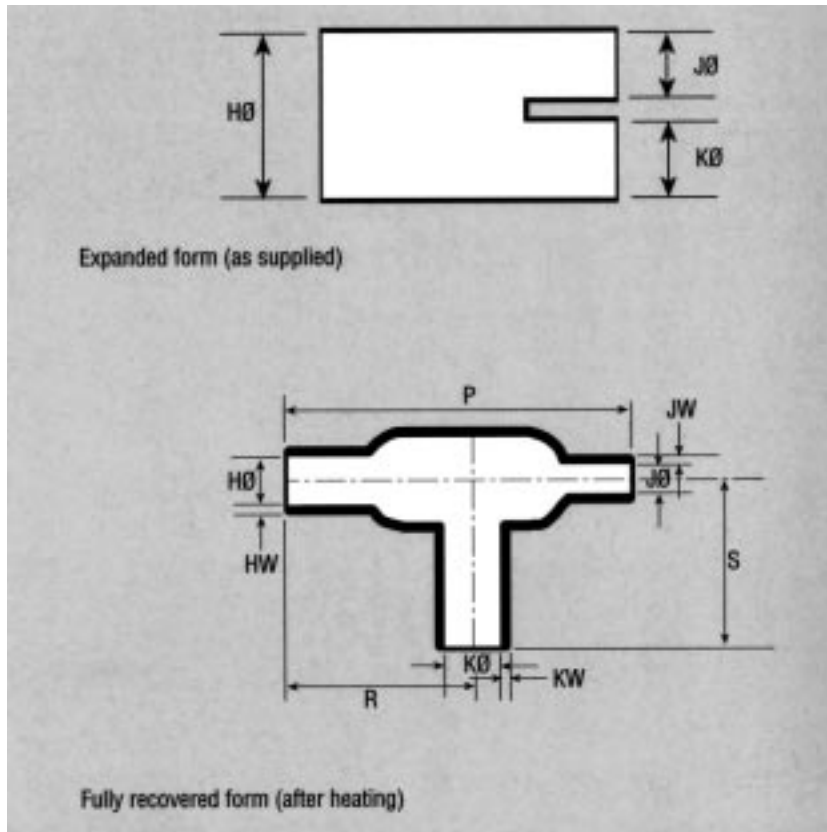

Dimensions apply to all materials unless otherwise indicated and are in inches.

Hellermann Part No.	Expanded (Min)			Recovered (Max)			Recovered dimensions fully recovered					
	H	J	K	H	J	K	P ±10%	R ±10%	S ±10%	HW ±20%	JW ±20%	KW ±20%
1217-1	0.39	0.24	0.24	0.10	0.09	0.10	2.24	0.75	0.93	0.04	0.04	0.04
1222-1	1.22	0.71	0.98	0.60	0.35	0.59	3.62	2.05	1.77	0.09	0.09	0.09
1223-1	1.16	0.38	1.16	0.64	0.21	0.64	3.67	2.23	2.23	0.10	0.07	0.07

### MATERIALS AVAILABLE

Reference	Specification	Description
J	MIL-I-81765/TYPE II	Flexible polyolefin
B7	MIL-I-81765/TYPE I	Semi-rigid flame retarded polyolefin
G	VG 95343 PART 6	Fluid resistant elastomer
H	NAVSEA 5617649	Flexible limited fire hazard material

### ADHESIVE COATING OPTIONS

Reference	Description
WM250	General purpose hot melt +80°C
W8	High performance hot melt +105°C


For ordering procedure – refer to page 5

# 1200 SERIES

OFF-SET  
T SHAPES-VG STYLE



Expanded form (as supplied)

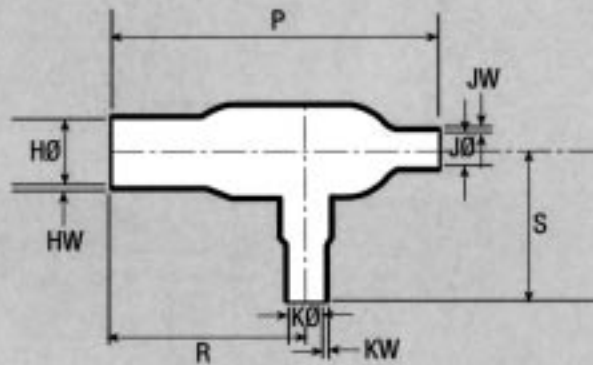

Fully recovered form (after heating)

This style provides strain relief, sealing and mechanical protection on cable harnesses.

Dimensions apply to all materials unless otherwise indicated and are in inches.

VG Part No.	Hellermann Part No.	Expanded (Min)			Recovered (Max)			Recovered dimensions fully shrunk					
		H	J	K	H	J	K	P ±10%	R ±10%	S ±10%	HW ±20%	JW ±20%	KW ±20%
VG95343 T 08A 016 A	* 1204-1	0.51	0.26	0.26	0.30	0.16	0.16	2.20	1.30	0.76	0.06	0.04	0.04
VG95343 T 08A 017 A	* 1216-1	1.30	0.65	0.65	0.51	0.26	0.26	3.82	2.13	1.52	0.10	0.06	0.06
—	* 1226-1	1.20	0.70	0.70	0.60	0.35	0.35	3.20	1.87	1.50	0.09	0.05	0.05

### MATERIALS AVAILABLE

Reference	Specification	Description
J	* MIL-I-81765/TYPE II	Flexible polyolefin
B7	* MIL-I-81765/TYPE I	Semi-rigid flame retarded polyolefin
G	* VG 95343 PART 6	Fluid resistant elastomer
H	NAVSEA 5617649	Flexible limited fire hazard material

### ADHESIVE COATING OPTIONS

Reference	Description
WM250	General purpose hot melt +80°C
W8	High performance hot melt +105°C

For ordering procedure – refer to page 5

\* Standard products and material.