


# 1500 SERIES CONNECTOR COVER FOR MIN-D SERIES WITH TOP ENTRY



This style provides strain relief and mechanical protection.

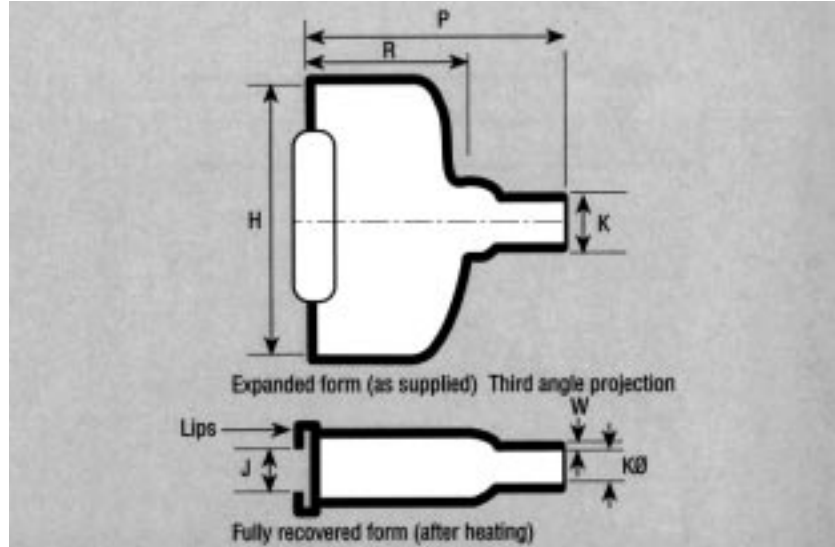

Dimensions apply to all materials unless otherwise indicated and are in inches.

HELLERMANN PART NO.	Expanded (Min)			Recovered (Max)			Recovered dimensions fully shrunk			Connector Size No. of Ways
	H	J	K	H	J	K	P ±10%	R ±10%	W ±10%	
1505-1	0.80	0.42	0.31	0.80	0.42	0.16	1.30	0.75	0.04	9
1505-2	0.63	0.63	0.63	0.80	0.42	0.16	1.30	0.75	0.04	9
1505-7	0.80	0.59	0.47	0.80	0.42	0.16	1.89	0.75	0.04	9
1505-8	0.63	0.63	0.63	0.80	0.42	0.16	1.89	0.75	0.04	9
1506-1	1.11	0.42	0.40	1.11	0.42	0.21	1.53	0.87	0.04	15
1506-2	0.75	0.75	0.75	1.11	0.42	0.21	1.53	0.87	0.04	15
1506-5	1.46	0.42	0.40	1.11	0.42	0.21	1.53	0.87	0.04	15
* 1507-1	1.66	0.42	0.55	1.66	0.42	0.32	1.77	1.00	0.04	25
* 1507-2	1.15	1.15	1.15	1.66	0.42	0.32	1.77	1.00	0.04	25
1507-7	2.17	0.55	0.98	1.66	0.42	0.32	1.77	1.00	0.04	25
1501-1	2.30	0.42	0.68	2.31	0.42	0.34	2.10	1.12	0.04	37
1501-2	1.35	1.35	1.35	2.31	0.42	0.34	2.10	1.12	0.04	37
1502-1	1.48	1.48	1.48	2.28	0.54	0.41	2.40	1.25	0.04	50
1502-2	2.28	0.54	0.75	2.28	0.54	0.41	2.40	1.25	0.04	50

WITHOUT LIPS										
HELLERMANN PART NO.	H	J	K	H	J	K	P ±10%	R ±10%	W ±10%	Connector Size No. of Ways
1505-3	0.83	0.49	0.31	0.80	0.42	0.16	1.30	0.75	0.04	9
* 1507-3	1.66	0.42	0.55	1.66	0.42	0.32	1.77	1.00	0.04	25
1501-3	2.35	0.49	0.68	2.31	0.42	0.34	2.10	1.12	0.04	37
1501-7	2.30	0.42	0.68	2.31	0.42	0.34	2.10	1.12	0.04	37
1502-3	2.26	0.54	0.75	2.28	0.54	0.41	2.40	1.25	0.04	50

### MATERIALS AVAILABLE

Reference	Specification	Description
J	* MIL-I-81765/TYP E II	Flexible polyolefin
B7	* MIL-I-81765/TYP E I	Semi-rigid flame retarded polyolefin
G	* VG 95343 PART 6	Fluid resistant elastomer
H	NAVSEA 5617649	Flexible limited fire hazard material

### ADHESIVE COATING OPTIONS

Reference	Description
WM250	General purpose hot melt +80°C
W8	High performance hot melt +105°C

For ordering procedure – refer to page 5

\* Standard products and material.