


170 SERIES

BOTTLE SHAPES
WITH RIB-VG STYLE



This style provides cable strain relief in applications of partially loaded connectors, resulting in small cable diameters.

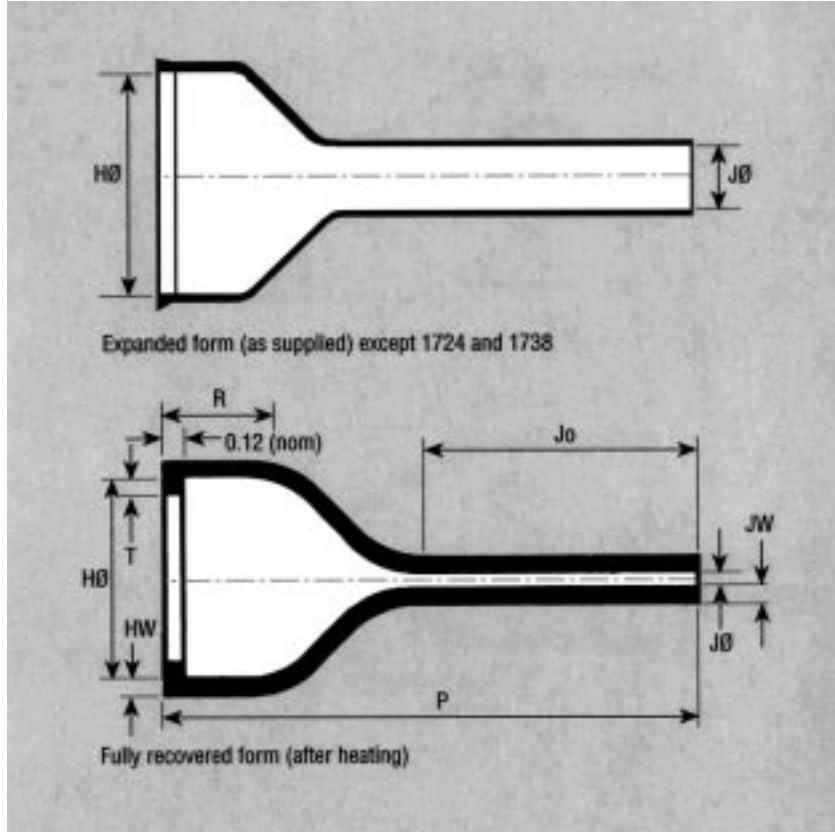

Dimensions apply to all materials unless otherwise indicated and are in inches

VG Part No.	Hellermann Part No.	Expanded (Min)		Recovered (Max)		Recovered dimensions fully shrunk					
		H	J	H	J	P ±10%	R ±10%	T ±10%	Jo ±10%	HW ±20%	JW ±20%
—	1724-1	0.79	0.79	0.65	0.18	1.65	0.79	0.00	0.39	0.04	0.04
—	1738-1	0.79	0.79	0.65	0.18	1.26	0.39	0.00	0.87	0.04	0.04
VG95343 T 06D 011 A	* 176-1	0.76	0.25	0.51	0.08	2.37	0.46	0.04	1.48	0.06	0.04
—	176-2	0.76	0.25	0.51	0.08	1.18	0.46	0.04	0.29	0.06	0.04
—	* 176-3	0.98	0.16	0.51	0.08	1.77	0.46	0.04	1.48	0.06	0.04
—	176-4	0.76	0.25	0.51	0.08	2.37	0.46	0.04	1.48	0.06	0.04
VG95343 T 06D 012 A	177-1	1.03	0.30	0.75	0.10	2.92	0.48	0.04	1.77	0.07	0.04
VG95343 T 06D 013 A	178-1	1.35	0.38	1.02	0.12	3.32	0.48	0.04	2.01	0.07	0.04
VG95343 T 06D 014 A	179-1	1.72	0.45	1.34	0.14	3.92	0.48	0.07	2.36	0.07	0.04

NOTE: 1724 and 1738 are without end ribs.

MATERIALS AVAILABLE

Reference	Specification	Description
J	* MIL-I-81765/TYPE II	Flexible polyolefin
B7	* MIL-I-81765/TYPE I	Semi-rigid flame retarded polyolefin
G	* VG 95343 PART 6	Fluid resistant elastomer
H	NAVSEA 5617649	Flexible limited fire hazard material

ADHESIVE COATING OPTIONS

Reference	Description
WM250	General purpose hot melt +80°C
W8	High performance hot melt +105°C

For ordering procedure – refer to page 5

* Standard products and materials.