


1760, 1790, 1820 SERIES LOCATING BUSHES




This style provides location, cushioning shimming and protection on cable lengths.

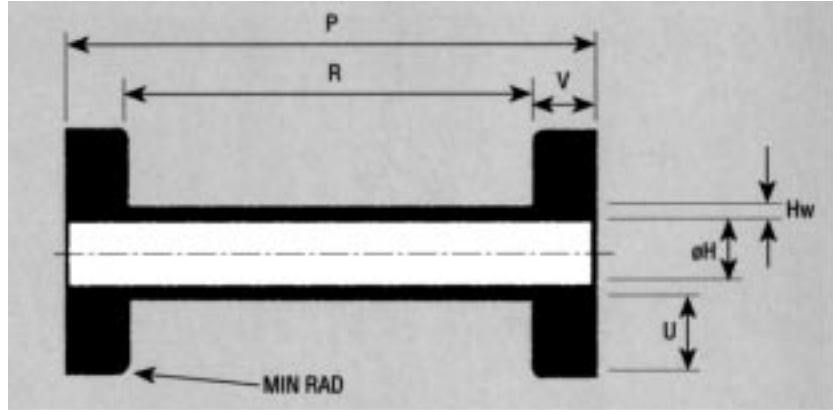

Dimensions apply to all materials unless otherwise indicated and are in inches.

Hellermann Part No.	Expanded (Min)		Rec'd (Max)		Recovered dimensions fully shrunk				
	H Min	H Max	P ±10%	R ±10%	U ±10%	V ±10%	Hw ±20%		
1764-1	0.50	0.118	1.18	0.946	0.18	0.118	0.060		
1793-3	1.26	0.37	1.38	1.00	0.12	0.18	0.060		
1794-3	1.42	0.71	1.38	1.00	0.12	0.18	0.080		
1795-3	1.58	0.50	1.38	1.00	0.12	0.18	0.080		
1796-3	0.86	0.25	1.14	0.95	0.80	0.98	0.600		

This style suits non round cable bundles

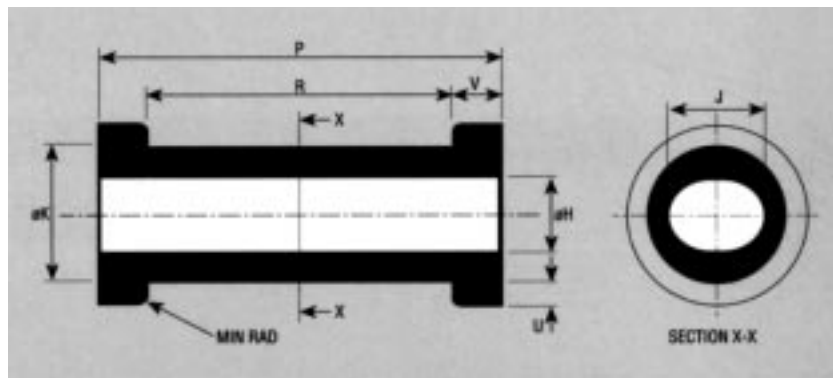

Dimensions apply to all materials unless otherwise indicated and are in inches.

Hellermann Part No.	Expanded (Min)		Rec'd (Max)		Recovered dimensions fully shrunk				
	H Min	J Min	H Max	J Max	K ±10%	P Max	R ±10%	U ±10%	V ±10%
1822-2	0.47	0.47	0.23	0.40	0.47	1.18	0.95	0.80	0.19
1823-3	0.63	0.63	0.30	0.48	0.55	1.26	0.95	0.098	0.16

MATERIALS AVAILABLE

Reference	Specification	Description
J	MIL-I-81765/TYPE II	Flexible polyolefin
B7	* MIL-I-81765/TYPE I	Semi-rigid flame retarded polyolefin
G	* VG 95343 PART 6	Fluid resistant elastomer
H	NAVSEA 5617649	Flexible limited fire hazard material

ADHESIVE COATING OPTIONS

Reference	Description
WM250	General purpose hot melt +80°C
W8	High performance hot melt +105°C

For ordering procedure – refer to page 5

* Standard material.