


200 SERIES
2-WAY OUTLET
SHAPES LOW PROFILE



This style provides cable sealing strain relief and mechanical protection.

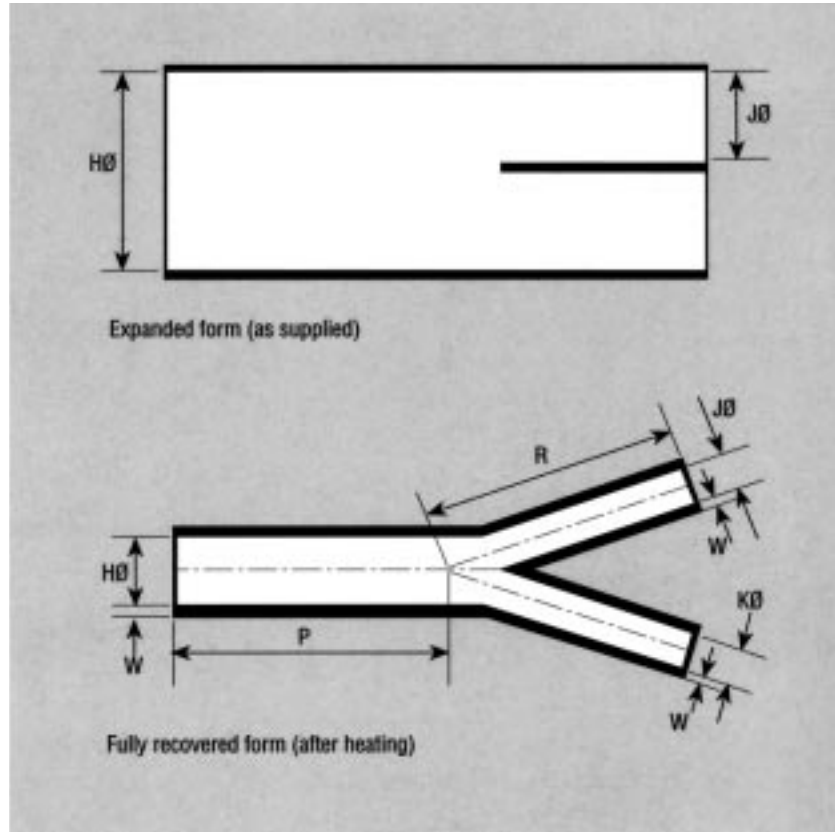

Dimensions apply to all materials unless otherwise indicated and are in inches.

Hellermann Part No.	Expanded (Min)			Recovered (Max)			Rec'd dimensions fully shrunk		
	H	J	K	H	J	K	P ±10%	R ±10%	W ±20%
201-1	0.75	0.55	0.55	0.37	0.25	0.25	2.00	1.20	0.06
201-3	1.00	0.55	0.55	0.37	0.25	0.25	2.00	1.20	0.06
202-1	0.75	0.30	0.30	0.37	0.15	0.15	2.00	1.20	0.06
202-2	0.79	0.49	0.49	0.37	0.15	0.15	2.00	1.20	0.06
202-3	0.96	0.63	0.63	0.37	0.15	0.15	2.00	1.20	0.06

MATERIALS AVAILABLE		
Reference	Specification	Description
J	MIL-I-81765/TYPE II	Flexible polyolefin
B7	MIL-I-81765/TYPE I	Semi-rigid flame retarded polyolefin
G	VG 95343 PART 6	Fluid resistant elastomer
H	NAVSEA 5617649	Flexible limited fire hazard material

ADHESIVE COATING OPTIONS	
Reference	Description
WM250	General purpose hot melt +80°C
W8	High performance hot melt +105°C


For ordering procedure – refer to page 5

200 SERIES

2-WAY OUTLET SHAPES - VG STYLE



Expanded form (as supplied)

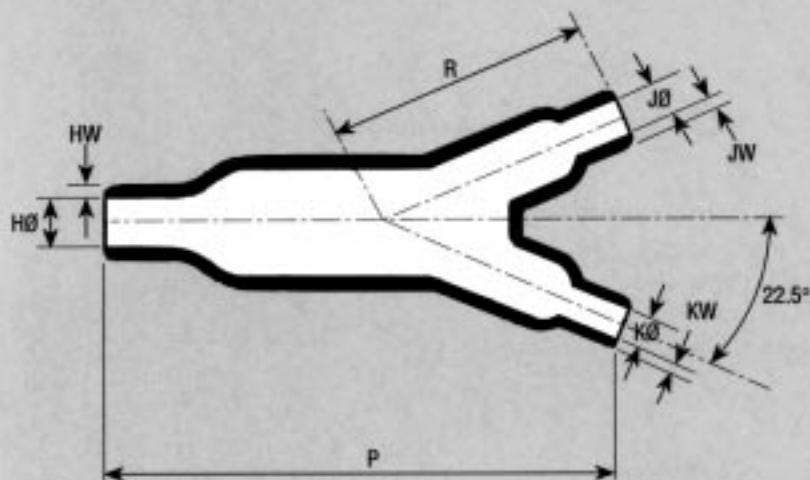

Fully recovered form (after heating)

This style provides cable sealing, strain relief and mechanical protection.

For VG shapes according to TO9 add 'P' after Hellermann part number.

Dimensions apply to all materials unless otherwise indicated and are in inches.

H Expanded is maximum width not diameter.

VG Part No.	Hellermann Part No.	Expanded (Min)				Recovered (Max)		Recovered dimensions fully shrunk			
		H	H -H Matl	J,K	J,K -H Matl	H	J,K	P ±10%	R ±10%	HW ±30%	JW, KW ±30%
	* 227-1	0.52	0.52	0.26	0.26	0.15	0.10	1.61	0.76	0.08	0.04
VG95343 T 08C 001 A	* 206-1	0.51	0.51	0.28	0.28	0.24	0.12	1.61	0.75	0.06	0.04
	* 213-1	0.68	0.68	0.44	0.44	0.31	0.31	3.27	2.52	0.09	0.04
	213-2	1.57	0.00	1.25	0.00	0.31	0.31	3.27	2.52	0.09	0.09
VG95343 T 08C 005 A	212-1	0.57	0.57	0.33	0.33	0.31	0.22	5.35	2.48	0.10	0.08
VG95343 T 08C 002 A	* 203-1	1.06	1.06	0.51	0.51	0.47	0.24	3.15	1.69	0.10	0.06
VG95343 T 08C 003 A	* 204-1	1.54	1.54	1.06	1.06	0.71	0.47	5.16	3.19	0.12	0.10
VG95343 T 08C 004 A	211-1	2.20	2.20	1.06	1.06	1.02	0.51	6.81	3.70	0.18	0.10

MATERIALS AVAILABLE

Reference	Specification	Description
J	* MIL-I-81765/TYPE II	Flexible polyolefin
B7	* MIL-I-81765/TYPE I	Semi-rigid flame retarded polyolefin
G	* VG 95343 PART 6	Fluid resistant elastomer
H	NAVSEA 5617649	Flexible limited fire hazard material

ADHESIVE COATING OPTIONS


Reference	Description
WM250	General purpose hot melt +80°C
W8	High performance hot melt +105°C

For ordering procedure – refer to page 5


* Standard products and materials.

200 SERIES

2-WAY OUTLET
SHAPES IN LINE



This style provides cable sealing strain relief and mechanical protection. Ideal for power and signal applications.

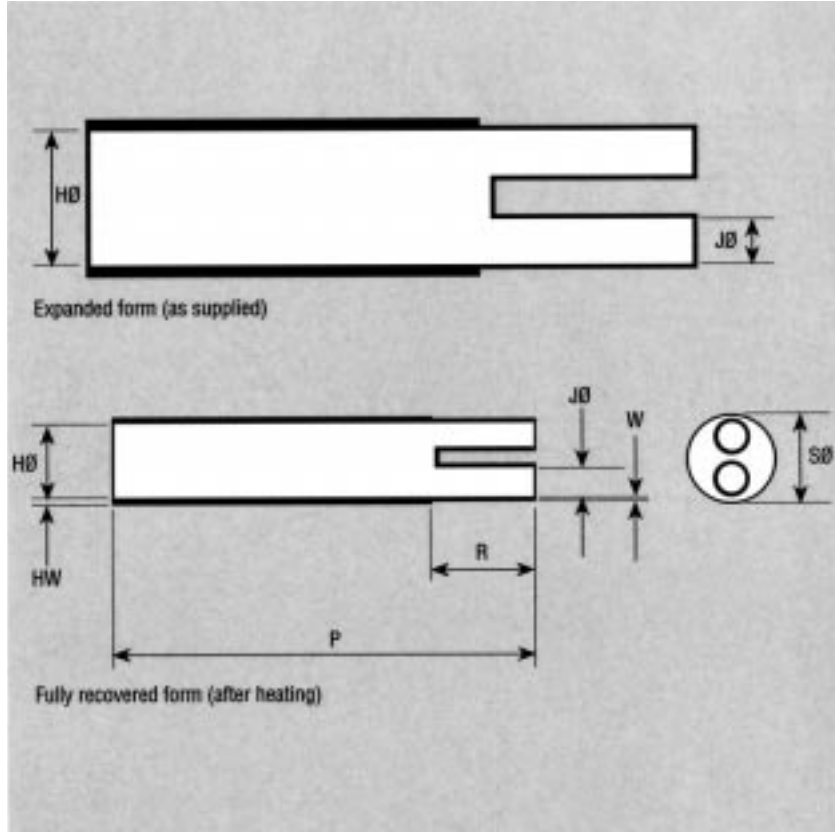

Dimensions apply to all materials unless otherwise indicated and are in inches.

NAVSEA REFERENCE	Hellermann Part No.	Expanded (Min)				Recovered (Max)		Recovered dimensions fully shrunk				
		H	H -H Matl	J	J -H Matl	H	J	P ±10%	R ±10%	S (nom)	HW ±20%	W ±20%
—	223-1	1.18	1.18	0.59	0.59	0.37	0.16	3.70	1.18	0.79	0.06	0.05
IA62-1	* 216-3	0.83	0.83	0.35	0.35	0.37	0.11	3.01	0.79	0.59	0.06	0.06
IA62-2	* 217-2	1.22	1.22	0.59	0.59	0.60	0.17	3.92	1.12	0.75	0.09	0.09
IA62-3	* 218-2	1.97	1.97	0.83	0.83	0.90	0.30	4.69	1.34	1.18	0.13	0.13
—	220-1	1.97	1.97	0.91	0.91	1.10	0.31	6.89	3.94	1.30	0.10	0.10
IA62-4	* 219-2	3.43	3.43	1.69	1.69	1.50	0.50	5.57	1.67	1.73	0.15	0.15
—	221-1	3.62	3.62	1.81	1.81	1.65	0.59	6.89	3.94	1.85	0.10	0.08

MATERIALS AVAILABLE

Reference	Specification	Description
J	MIL-I-81765/TYPE II	Flexible polyolefin
B7	* MIL-I-81765/TYPE I	Semi-rigid flame retarded polyolefin
G	VG 95343 PART 6	Fluid resistant elastomer
H	NAVSEA 5617649	Flexible limited fire hazard material
B8		Semi-rigid flame retarded polyolefin

ADHESIVE COATING OPTIONS

Reference	Description
W1	Band lined WM250

For ordering procedure – refer to page 5

* Standard products and material.