


2100 SERIES
CONNECTOR COVER
FOR MIN D SERIES
WITH 90° ENTRY



This style provides strain relief and mechanical protection.

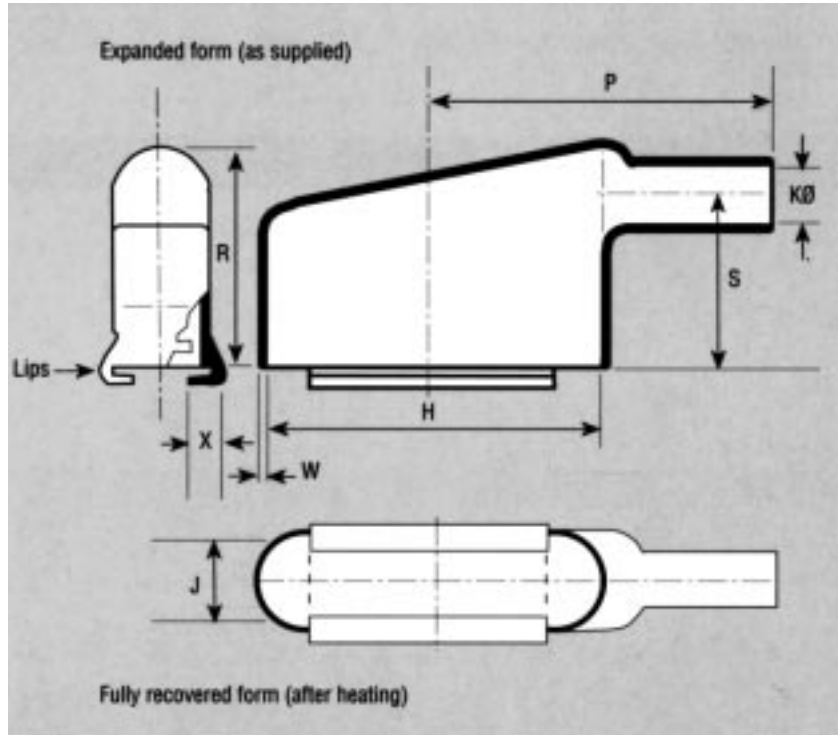

Dimensions apply to all materials unless otherwise indicated and are in inches.

WITH LIPS	Expanded (Min)						Recovered (Max)			Recovered dimensions fully shrunk					
	H	H -H Matl	J	J -H Matl	K	K -H Matl	H	J	K	S ±10%	P ±10%	R ±10%	X ±10%	W ±20%	Connector size No. of ways
Hellermann Part No.															
2101-1	0.80	0.80	0.42	0.42	0.31	0.31	0.80	0.42	0.16	0.60	1.02	0.85	0.12	0.04	9
2101-2	0.63	0.48	0.63	0.48	0.63	0.48	0.80	0.42	0.16	0.60	1.02	0.85	0.12	0.04	9
2102-1	1.11	1.11	0.42	0.42	0.40	0.40	1.11	0.42	0.21	0.73	1.21	0.97	0.12	0.04	15
2102-2	0.75	0.63	0.75	0.63	0.75	0.63	1.11	0.42	0.21	0.73	1.21	0.97	0.12	0.04	15
2103-1	1.66	1.66	0.42	0.42	0.55	0.63	1.66	0.42	0.29	0.87	1.69	1.10	0.12	0.04	25
2103-2	1.15	0.87	1.15	0.87	1.15	0.87	1.66	0.42	0.29	0.87	1.69	1.10	0.12	0.04	25
2104-1	2.31	2.31	0.42	0.42	0.68	0.68	2.31	0.42	0.34	1.00	2.10	1.20	0.12	0.04	37
2105-1	2.28	2.28	0.54	0.54	0.75	0.75	2.28	0.54	0.42	1.00	2.20	1.27	0.12	0.04	50
2105-2	1.48	1.26	1.48	1.26	1.48	1.26	2.28	0.54	0.42	1.00	2.20	1.27	0.12	0.04	50

WITHOUT LIPS	Expanded (Min)						Recovered (Max)			Recovered dimensions fully shrunk					
	H	H -H Matl	J	J -H Matl	K	K -H Matl	H	J	K	S ±10%	P ±10%	R ±10%	X ±10%	W ±20%	Connector size No. of ways
2103-3#	1.69	1.69	0.49	0.49	0.55	0.55	1.66	0.42	0.29	0.87	1.69	1.10	0.12	0.04	25
2105-3#	2.26	2.26	0.60	0.60	0.75	0.75	2.28	0.54	0.42	1.00	2.20	1.27	0.12	0.04	50

MATERIALS AVAILABLE		
Reference	Specification	Description
J	MIL-I-81765/TYPE II	Flexible polyolefin
B7	MIL-I-81765/TYPE I	Semi-rigid flame retarded polyolefin
G	VG 95343 PART 6	Fluid resistant elastomer
H	NAVSEA 5617649	Flexible limited fire hazard material

ADHESIVE COATING OPTIONS	
Reference	Description
WM250	General purpose hot melt +80°C
W8	High performance hot melt +105°C

For ordering procedure – refer to page 5