


500 SERIES

5-WAY OUTLET
SHAPE IN LINE



This style provides cable sealing, strain relief and mechanical protection. Ideal for power and signal applications.

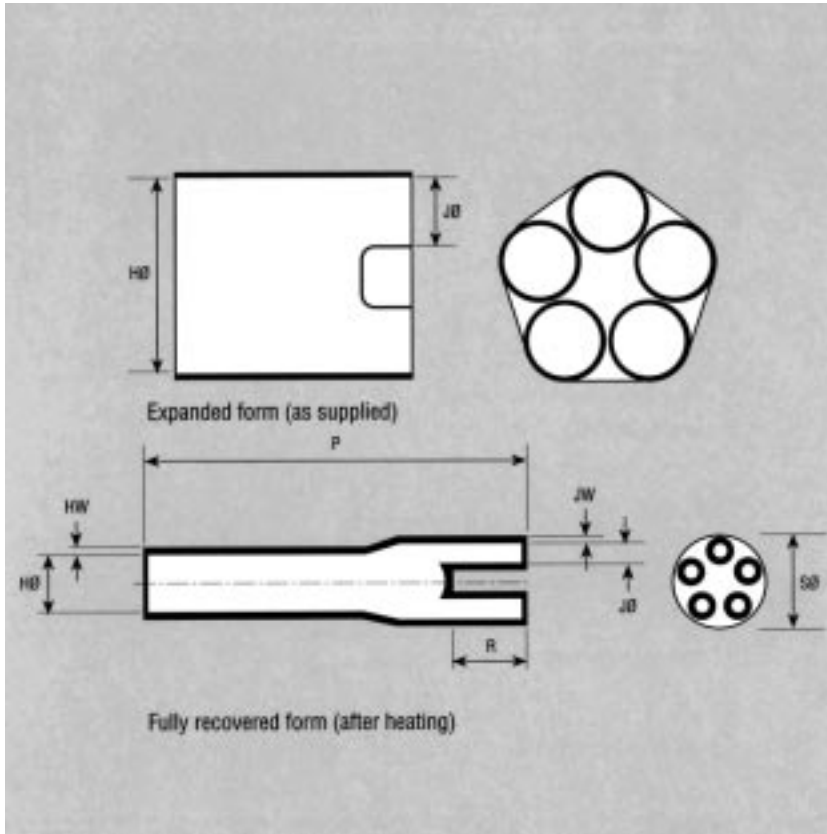

Dimensions apply to all materials unless otherwise indicated and are in inches.

| Hellermann Part No. | Expanded (Min) | | | | | Rec'd (Max) | | Recovered dimensions fully recovered | | | |
|---------------------|----------------|--------------|------|--------------|------|-------------|------------|--------------------------------------|-----------|------------|------------|
| | H | H -H Matl | J | J -H Matl | H | J | S (Nom) | P ±10% | R ±10% | HW ±20% | JW ±20% |
| 508-1 | 2.36 | 2.36 | 1.18 | 0.89 | 0.96 | 0.30 | 1.89 | 7.09 | 1.18 | 0.14 | 0.12 |

| MATERIALS AVAILABLE | | |
|---------------------|-----------------------|---------------------------------------|
| Reference | Specification | Description |
| J | * MIL-I-81765/TYPE II | Flexible polyolefin |
| B7 | * MIL-I-81765/TYPE I | Semi-rigid flame retarded polyolefin |
| G | VG 95343 PART 6 | Fluid resistant elastomer |
| H | NAVSEA 5617649 | Flexible limited fire hazard material |
| B8 | | Semi-rigid flame retarded polyolefin |

| ADHESIVE COATING OPTIONS | |
|--------------------------|------------------|
| Reference | Description |
| W1 | Band lined WM250 |

For ordering procedure – refer to page 5

* Standard materials.