



Medium Walled OHXL

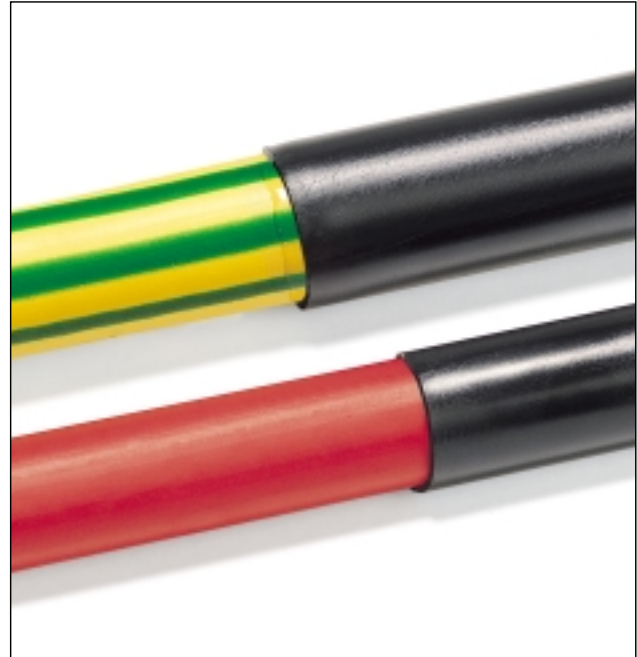

Heatshrink Sizing Guide

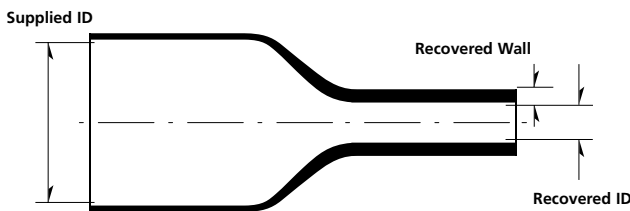

Heatshrink Tubing (OHXL)		OHXL		
Ref.				
Name	Limited Fire Hazard Heatshrink			
Material	Medium Walled Flexible Polyolefin			
Shrink Ratio	2:1			
Min. Working Temperature	-40°C			
Max. Working Temperature	105°C			
Intermittent Temperature	135°C			
Minimum Shrink Temperature	120°C			
Halogen Content	Halogen Free			
Tensile Strength	10MPa			
Elongation	250%			
Fluid Resistance	Good			
Excellent Resistance To	Abrasion			
Good Resistance To	Acids, Alkalis, Fuels & Oil			
Material Specification	BSG198-3, Defstan 59-97			
Shelf Life	5 Years			
Standard Colours	Black (BK)			
Ref	Supplied ID	Recovered ID	Nominal Recovered Wall	Colour
OHXL30BK	3.0	1.5	0.7	Black
OHXL50BK	5.0	2.5	0.85	Black
OHXL80BK	8.0	4.0	0.85	Black
OHXL120BK	12.0	6.4	1.2	Black
OHXL180BK	18.0	9.0	1.4	Black
OHXL240BK	24.0	12.0	1.8	Black
OHXL400BK	40.0	20.0	1.8	Black
OHXL600BK	60.0	60.0	1.8	Black

All dimensions are in mm (nominal) and are subject to technical modification.